


Compensator antivibrant cu flanse

APA



Compensator antivibrant cu flanse


DN		32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L +/- 5		95	95	105	115	130	135	170	180	205	240	260	265	265	265	265	265
H		69	69	85	106	116.0	150	180	209	260	320	367	408	472	522	570	690
P	[mm]	40	40	52	68	76.0	103	128	152	194	250	300	320	372	415	454	580
Compresiune		9	10	10	13	15.0	19	19	20	25	25	25	25	25	25	25	25
Extindere		6	6	7	7	8	10	12	12	16	16	16	16	16	16	16	16
Deviatie axiala [S]		9	9	10	11	12	13	13	14	22	22	22	22	22	22	22	22
Deviatie unghiulara [Q]	[°]	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15
Masa	[kg]	3.0	3.57	4.11	5.13	6.23	6.98	9.64	12.4	17.3	22.7	29.15	38.9	48.0	55.4	66.0	73.0

Descrierea produsului:

- Flanse din otel galvanizat
- Garnitura din cauciuc EPDM conform PN-ISO 1629:2005


Domenii de utilizare:

In retele de transport si distributie apa potabila, sisteme de pompare apa, in sistemele de incalzire si aer conditionat cu presiunea de lucru max. PN10/PN16

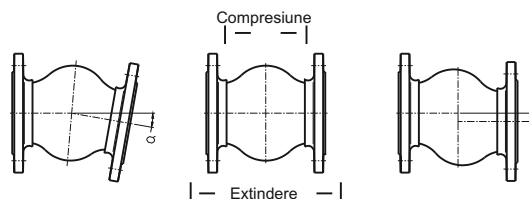

Compensator antivibrant cu capete filetate

APA

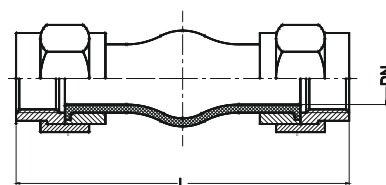

Compensator antivibrant cu capete filetate

Descrierea produsului:

- Capete filetate din otel galvanizat
- Garnitura din cauciuc EPDM conform PN-ISO 1629:2005

Application:

In retele de transport si distributie apa potabila, sisteme de pompare apa, in sistemele de incalzire si aer conditionat cu presiunea de lucru max. PN10/PN16

DN	G	L _{min-max}	K	Masa
[mm]	[cal]	[mm]	[°]	[kg]
20	3/4"	203 (+/- 22)	32	0.8
25	1"		25	1.1
32	1-1/4"		25	1.4
40	1-1/2"		20	1.7
50	2"		15	2.4
65	2-1/2"		12	4.3
80	3"		10	4.9

Ne rezervam dreptul de a modifica caracteristicile produselor in functie de evolutia tehnica.